

Weatherproof Cover Solutions

Keep outdoor receptacles and outlets shielded from the elements with our versatile lineup of weatherproof covers. Available in plastic, extra-duty plastic and extra-duty die-cast options, our rugged solutions provide lasting code-compliant protection.



Outdoor Receptacle Protection

Ensure outdoor receptacles stay protected all year long with our wide selection of in-use weatherproof covers. Our industry-leading solutions are available in a variety of single- and double-gang models and are an excellent choice in residential, commercial and industrial applications.

Simple Code Compliance

Secure and code compliant, our in-use covers are the perfect solution for commercial applications. They're available in a variety of colors, which can be used to match with business branding, as well as vertical and horizontal orientations.



Backyard Aesthetics

Do away with unflattering "wall warts" by installing our sleek, low-profile expandable in-use covers in residential applications. These modern covers enhance building aesthetics and include an expandable front window that can be collapsed to save space when not in use.

Vehicle Charging and Power Access

Keep outlets in outdoor applications such as vehicle charging and campsite power access protected from the elements with our rugged in-use weatherproof covers. Available extra-duty models align with commercial and industrial code standards.



Contents

Low-Profile Extra-Duty Plastic Covers.....	142
Extra-Duty Die-Cast In-Use Covers.....	144
Extra-Duty Plastic In-Use Covers	146
Plastic In-Use Covers	148
Accessories.....	152
Code Compliance.....	153

Additional Solutions and Resources

Ready to get started? Scan the QR code to the right for a variety of helpful resources, including sell sheets, product instructions, installation videos and more.



Weatherproof Covers

Low-Profile Extra-Duty Plastic Covers



Low-Profile, Expanded Possibilities

Our low-profile expandable in-use weatherproof covers provide a sleek, easy-to-use alternative to traditional in-use weatherproof cover options. The unique design of the WP6000, WP6200, WP7000 and WP7200 Series includes an expandable front window that can be collapsed to save space when not in use. This improves aesthetics while delivering dependable, code-compliant protection for a range of outdoor applications.

Available in standard and extra-duty configurations, our new plastic low-profile in-use covers are an excellent upgrade to any home or business.

Includes:

- **Improved Aesthetics** – Unlike traditional covers, Low-Profile In-Use Covers include an expandable front window that can be collapsed to save space when not in use
- **Simple, Secure Access** – An innovative new design provides a no-hassle latch with lockable hasp that can be opened effortlessly with one hand
- **Quick Installation** – GFCI pre-set; keyhole slots help electrical contractors complete installation in minutes
- **Configuration Options** – Available in single-gang and double-gang configurations, as well as standard and extra-duty; select white, gray or bronze color options; single-gang models accommodate both vertical and horizontal installations
- **Code Compliant** – WP7000 and WP7200 Series Low-Profile In-Use Covers comply with 2020 NEC Article 406.9 (B)(1) for wet locations and Extra-Duty applications; CEC 26-708 Compliant; RoHS Compliant

Upgrade today with the trusted market leader for in-use weatherproof covers. For more information, visit intermatic.com/low-profile-in-use-cover.

Low-Profile Extra-Duty Plastic In-Use Weatherproof Covers

SINGLE-GANG COVERS & DOUBLE-GANG COVERS

Plastic In-Use Weatherproof Covers are easy to install and include a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES

- 100% Paintable surface
- Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications
- CEC Section 26-708 compliant
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base, and inserts
- 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws
- Lockable hasp: All models accept up to 0.19" dia shank
- Impact rated: 12 lbf. impact test to ensure cover remains intact
- Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test
- Warranty: 1-year limited
- NEW Faster Installation, Pre-Set for GFCI, No insert required

SINGLE-GANG COVERS

- Two inserts provided with all models that allow each model to meet multiple installations (up to 8 configurations)

DOUBLE-GANG COVERS

- Four inserts provided with all models that allow each model to meet multiple installations (up to 16 configurations)



WP7000BR



WP7200G

SINGLE-GANG - VERTICAL/HORIZONTAL




Model #	Color	Style	Depth
WP6000G	Clear, Gray	Standard	1.5" (38.1 mm)
WP6000W	Clear, White	Standard	1.5" (38.1 mm)
WP6000BR	Bronze, Clear	Standard	1.5" (38.1 mm)
WP7000G	Clear, Gray	Extra-Duty	1.5" (38.1 mm)
WP7000W	Clear, White	Extra-Duty	1.5" (38.1 mm)
WP7000BR	Bronze, Clear	Extra-Duty	1.5" (38.1 mm)
WP7003G	Clear, Gray	Extra-Duty	1.5" (38.1 mm)


For accessories see page 152

DIMENSIONS

SINGLE-GANG

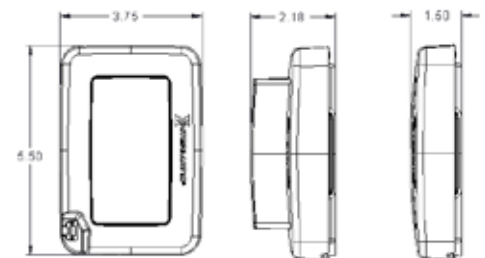

DOUBLE-GANG

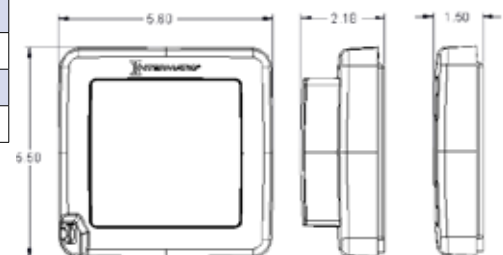

DOUBLE-GANG



Model #	Color	Style	Depth
WP6200G	Clear, Gray	Standard	1.5" (38.1 mm)
WP7200G	Clear, Gray	Extra-Duty	1.5" (38.1 mm)
WP7200W	Clear, White	Extra-Duty	1.5" (38.1 mm)
WP7200BR	Bronze, Clear	Extra-Duty	1.5" (38.1 mm)

For accessories see page 152



WP3110MXD



WP1010HMXD



WP1010MXD



WP1250MVXD



WP1030MXD



WP1250MXD

Extra-Duty Die-Cast In-Use Weatherproof Covers

SINGLE-GANG COVERS & DOUBLE-GANG COVERS

Die-Cast In-Use Aluminum Weatherproof Covers are extra-duty rated and easy to install. Heavy-duty die-cast aluminum construction ensures long-lasting durability. Covers come with a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Engine Block Heaters • Receptacle Protection • Walk-in Refrigeration Cooler/Freezer

FEATURES

- Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications
- Exceeds CEC Article 26-708
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty die-cast aluminum cover and mounting base with UV stabilized polycarbonate inserts
- 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws
- Lockable hasp: All models accept up to 1/4" (6 mm) dia shank
- Impact rated: 12 lbf. impact test to ensure cover remains intact
- Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test
- Warranty: 1-year limited

SINGLE-GANG

- Three inserts provided with all models that allow each model to meet multiple installations (up to 8 configurations)
- Max cord size: #12 AWG or smaller

DOUBLE-GANG

- Six inserts provided with all models that allow each model to meet multiple installations (up to 70 configurations)
- Max cord size: #12 AWG or smaller

SINGLE-GANG



Model #	Color	Depth	Flexi-Guard Inserts
WP1010MXD	Gray	3 1/8" (79 mm)	WP17
WP1010HMXD*	Gray	3 1/8" (79 mm)	WP17
WP1250MVXD	Gray	4 5/8" (117 mm)	WP17
WP3110MXD	Gray	2 3/4" (70 mm)	WP17

*Note: WP1010HMXD is a horizontal mount.
For accessories see page 152


DOUBLE-GANG





Model #	Color	Depth	Flexi-Guard Inserts
WP1030MXD	Gray	3 1/8" (79 mm)	WP217
WP1250MXD	Gray	4 5/8" (117 mm)	WP217

For accessories see page 152


DIMENSIONS

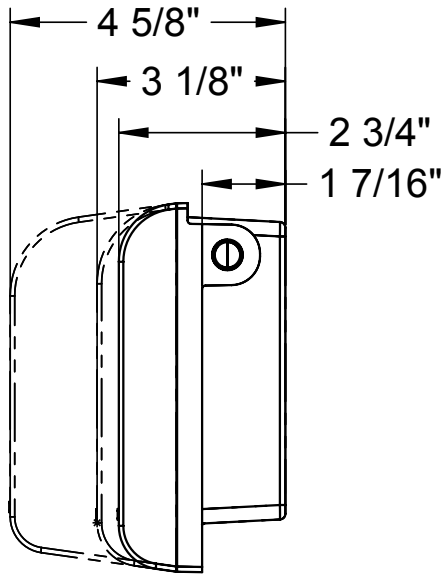



SINGLE-GANG

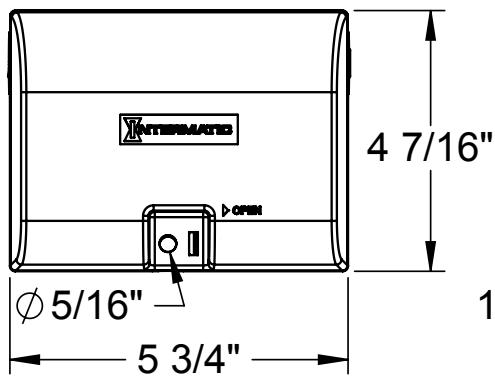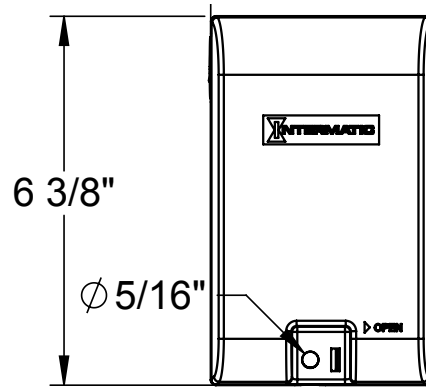

WP1010HMXD

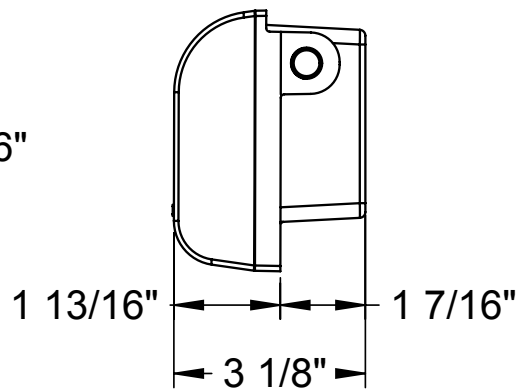

DOUBLE-GANG

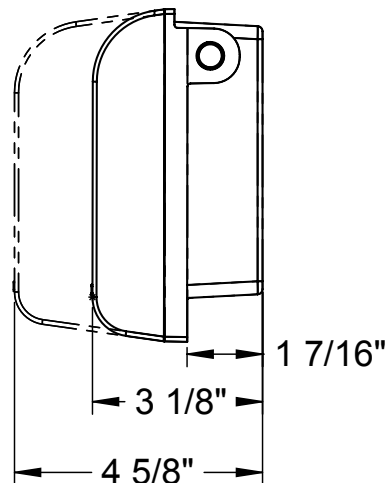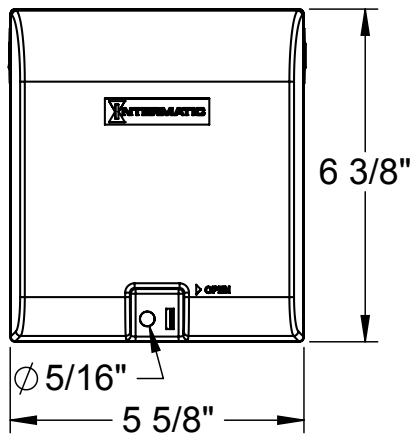


Weatherproof Covers

Extra-Duty Plastic In-Use Covers



WP5000G



Extra-Duty Plastic In-Use Weatherproof Covers

SINGLE-GANG COVERS & DOUBLE-GANG COVERS

Plastic In-Use Weatherproof Covers are extra-duty rated and easy to install. Covers come with a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES

- Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications
- CEC Section 26-708 compliant
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base, and inserts
- 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws
- Lockable hasp: All models accept up to 1/4" (6 mm) dia shank
- Impact rated: 12 lbf. impact test to ensure cover remains intact
- Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test
- Warranty: 1-year limited

SINGLE-GANG

- NEW Faster Installation, Pre-Set for GFCI, No insert required
- Two inserts provided with all models that allow each model to meet multiple installations (up to 16 configurations)
- Max cord size: (2) #14 AWG or (1) #12 AWG

DOUBLE-GANG

- Six inserts provided with all models that allow each model to meet multiple installations (up to 70 configurations)
- Max cord size: (2) #12 AWG or (1) #10 AWG
- 30/50 A (1) #6 AWG




WP5500C



WP5103C

SINGLE-GANG - VERTICAL/HORIZONTAL



Clear/Gray	Gray	Black	White	Bronze	Depth	Flexi-Guard Inserts
WP5000C	WP5000G	WP5000BL	WP5000W	–	2 1/4" (57 mm)	WP17
WP5100C	WP5100G	WP5100BL	WP5100W	WP5100BR	2 3/4" (70 mm)	WP17
WP5103C*	–	–	–	–	2 3/4" (70 mm)	WP17
WP5110C	–	–	–	–	3 5/8" (92 mm)	WP17

* Includes 3/0 adapter plate for 3" (76 mm) round box.
For accessories see page 152



DOUBLE-GANG - VERTICAL




Clear/Gray	Gray	Black	White	Beige	Depth	Flexi-Guard Inserts
WP5220C	WP5220G	WP5220BL	WP5220W	WP5220B	2 1/4" (57 mm)	WP217
WP5221C	–	–	–	–	2 1/4" (57 mm)	WP101, WP102
WP5225C	WP5225G	–	–	–	2 3/4" (70 mm)	WP217
WP5240C	–	–	–	–	3 5/8" (92 mm)	WP217
WP5500C	–	–	–	–	4 3/4" (121 mm)**	WP107, WP213

* Includes 3/0 adapter plate for 3" (76 mm) round box. **30/50 A = 4 3/4" (121 mm) depth.
For accessories see page 152



SINGLE-GANG

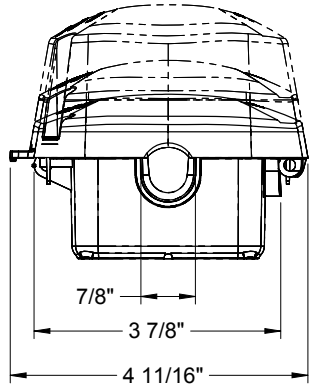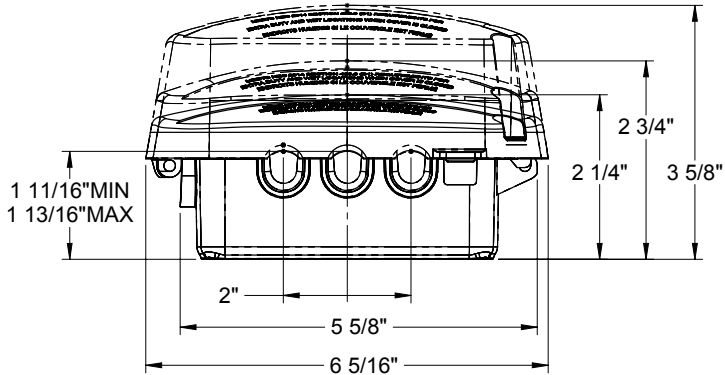


WP5103C

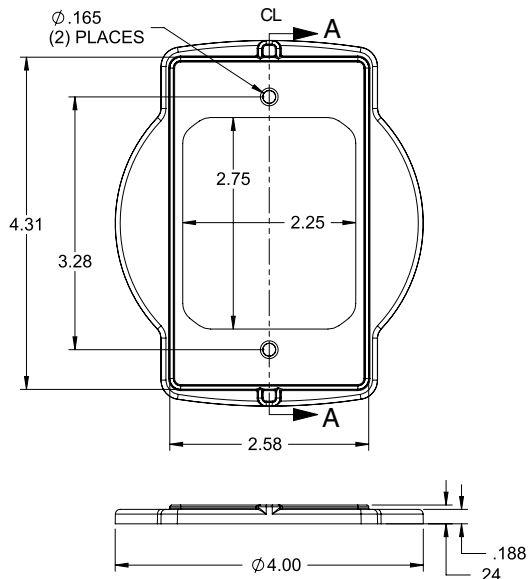

DOUBLE-GANG

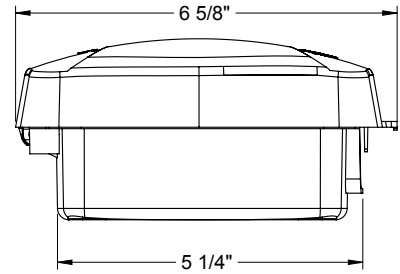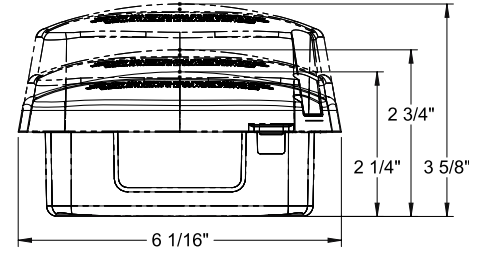

**DOUBLE-GANG
30/50 A**

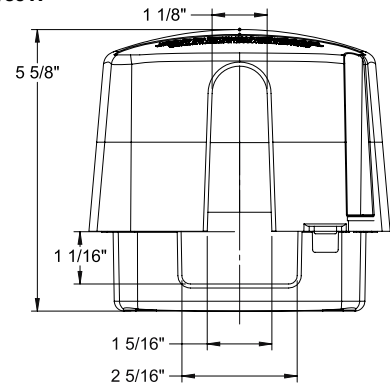

Weatherproof Covers

Plastic In-Use Covers



WP3103C



WP1100C



WP3100

Plastic In-Use Weatherproof Covers, Single-Gang, 16 Configurations

SINGLE-GANG COVERS

Plastic In-Use Weatherproof Covers are easy to install and include adhered gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES

- Complies with 2020 NEC Article (406.9 (B)(1) for damp and wet locations
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- 1/8" (3 mm) thick, pre-adhered neoprene gasket with slits for mounting screws
- Lockable hasp: All models accept up to 1/4" (6 mm) dia shank, except WP3100C & WP3103C accept up to 1/8" (3 mm) dia shank
- Three inserts provided with all models that allow each model to meet multiple installations (up to 16 configurations)
- Max cord size: (2) #14 AWG or (1) #12 AWG
- Mounts vertically or horizontally
- Warranty: 1-year limited





SINGLE-GANG - VERTICAL/HORIZONTAL HINGE

Model #	Color	Depth	Flexi-Guard Inserts
WP3100C	Clear	2 3/4" (70 mm)	WP17
WP3103C	Clear	2 3/4" (70 mm)	WP17
WP1100C	Clear	2 3/4" (70 mm)	WP17
WP1100WC	White	2 3/4" (70 mm)	WP17
WP1110C	Clear	3 3/8" (92 mm)	WP17

For accessories see page 152

DIMENSIONS

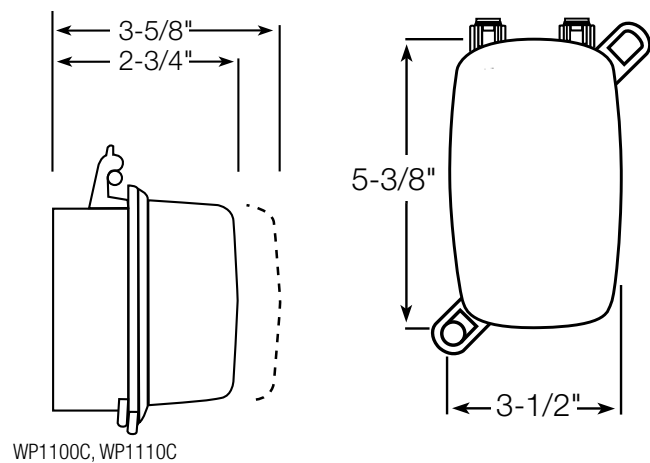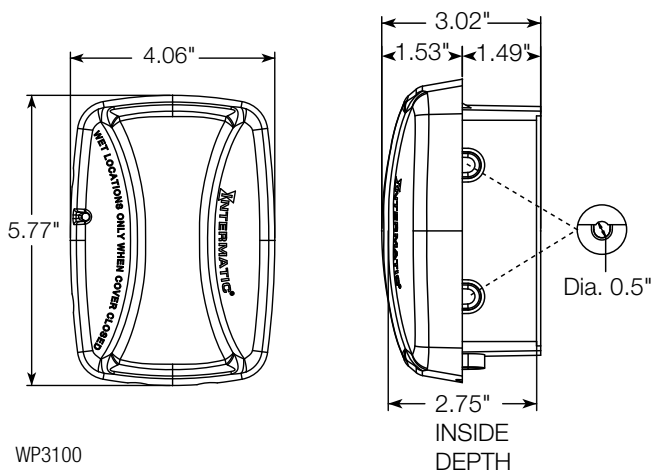

Plastic In-Use Weatherproof Covers, Single-Gang, 8 Configurations

SINGLE-GANG COVERS

Plastic In-Use Weatherproof Covers are easy to install and include adhered gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES


- Complies with 2020 NEC Article (406.9 (B)(1) for damp and wet locations
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- 1/8" (3 mm) thick, pre-adhered neoprene gasket with slits for mounting screws
- Three inserts provided with all models that allow each model to meet multiple installations (up to 8 configurations)
- Max cord size: (2) #14 AWG or (1) #12 AWG
- Warranty: 1-year limited



WP1000C

WP1000HC

DIMENSIONS

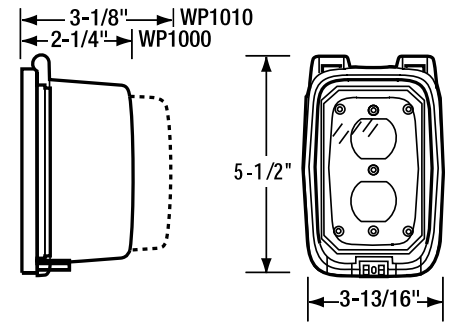

SINGLE-GANG - VERTICAL HINGE



Model #	Color	Depth	Flexi-Guard Inserts
WP1000C	Clear	2 1/4" (57 mm)	WP17
WP1000GC	Gray	2 1/4" (57 mm)	WP17
WP1010C	Clear	3 1/8" (79 mm)	WP17



For accessories see page 152

SINGLE-GANG - HORIZONTAL HINGE



Model #	Color	Depth	Flexi-Guard Inserts
WP1000HC	Clear	2 1/4" (57 mm)	WP17
WP1000HGC	Gray	2 1/4" (57 mm)	WP17
WP1010HC	Clear	3 1/8" (79 mm)	WP17
WP1150C	Clear	4 3/4" (121 mm)	WP17

For accessories see page 152

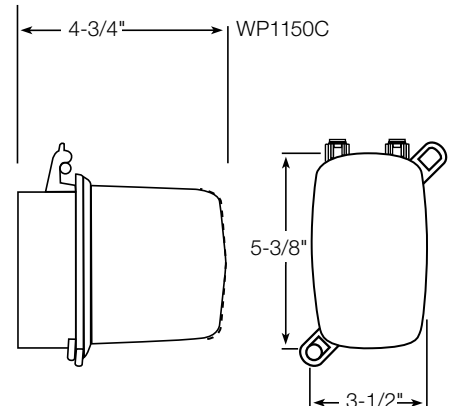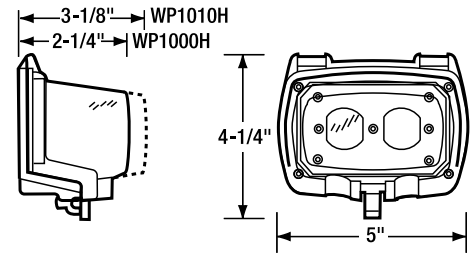


Weatherproof Covers

Plastic In-Use Covers




WP1020C

DIMENSIONS

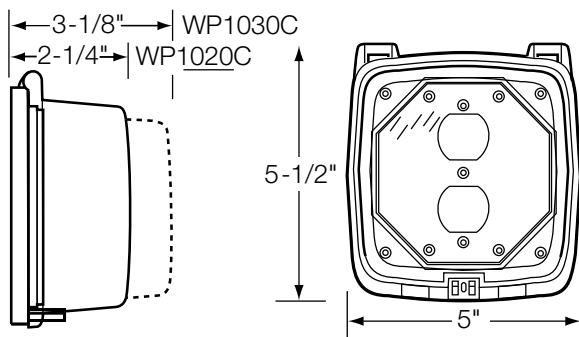

WP1050

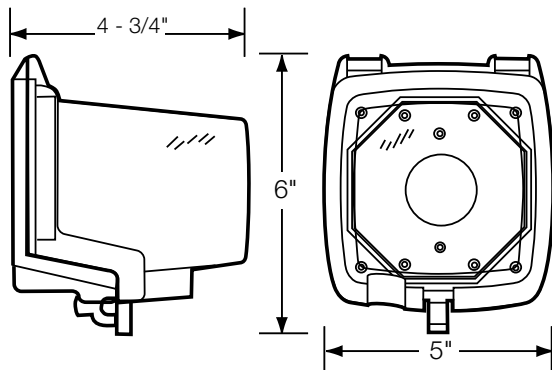

Plastic In-Use Weatherproof Covers, Double-Gang

DOUBLE-GANG COVERS

Plastic In-Use Weatherproof Covers are easy to install and include a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES

- Complies with 2020 NEC Article (406.9 (B)(1) for damp and wet locations
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- 1/8" (3 mm) thick neoprene gasket with slits for mounting screws
- Two inserts provided with all models for multiple installations
- Max cord size: (2) #14 AWG or (1) #12 AWG, WP1050 (2) #14 AWG or (1) #10 AWG
- Warranty: 1-year limited



DOUBLE-GANG - VERTICAL HINGE

Model #	Color	Depth	Flexi-Guard Inserts
WP1020C	Clear	2 1/4" (57 mm)	WP101, WP102
WP1030C	Clear	3 1/8" (79 mm)	WP101, WP102
WP1050	Clear	4 3/4" (121 mm)	WP102, WP107

For accessories see page 152

Plastic In-Use Weatherproof Covers, Double-Gang, 70 Configurations

DOUBLE-GANG COVERS

Plastic In-Use Weatherproof Covers are easy to install and include a gasket, mounting screws, base, cover assembly, and inserts to meet the needs of a variety of applications.

APPLICATIONS

- Receptacle Protection

FEATURES

- Complies with 2020 NEC Article (406.9 (B)(1) for damp and wet locations
- UL Certified for Type 3R outdoor enclosures
- Meets requirements for cold impact testing: -60° F (-51° C)
- Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- 1/8" (3 mm) thick neoprene gasket with slits for mounting screws
- Six inserts provided with all models that allow each model to meet multiple installations (up to 70 configurations)
- Max cord size: (2) #14 AWG or (1) #12 AWG, WP1250 (2) #14 AWG or (1) #10 AWG
- Warranty: 1-year limited



WP1250



DOUBLE-GANG - VERTICAL HINGE



Model #	Color	Depth	Flexi-Guard Inserts
WP1220C	Clear	2 1/4" (57 mm)	WP217
WP1230C	Clear	3 1/8" (79 mm)	WP217
WP1250C	Clear	4 3/4" (121 mm)	WP217

For accessories see page 152

DIMENSIONS

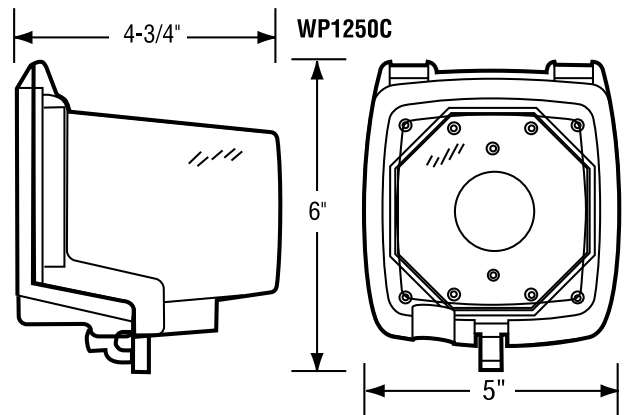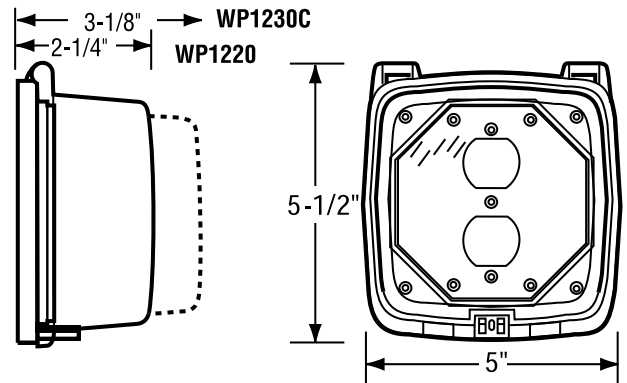


Flexi-Guard Inserts

All original series weatherproof covers include Flexi-guard inserts and mounting screws. Simply place the insert into the cover, rotate as needed, then snap it into place.

ACCESSORIES



Model #	Description
WP17	Single-Gang Inserts (3)
WP217	Double-Gang Inserts (6)
WP101	Double-Gang Duplex Insert
WP102	Double-Gang GFCI Insert
WP107	Double-Gang Round Insert, 1 3/8", 1 5/8", 1 3/4"
WP213	Double-Gang Round Insert, 2 1/8", 2 5/8"

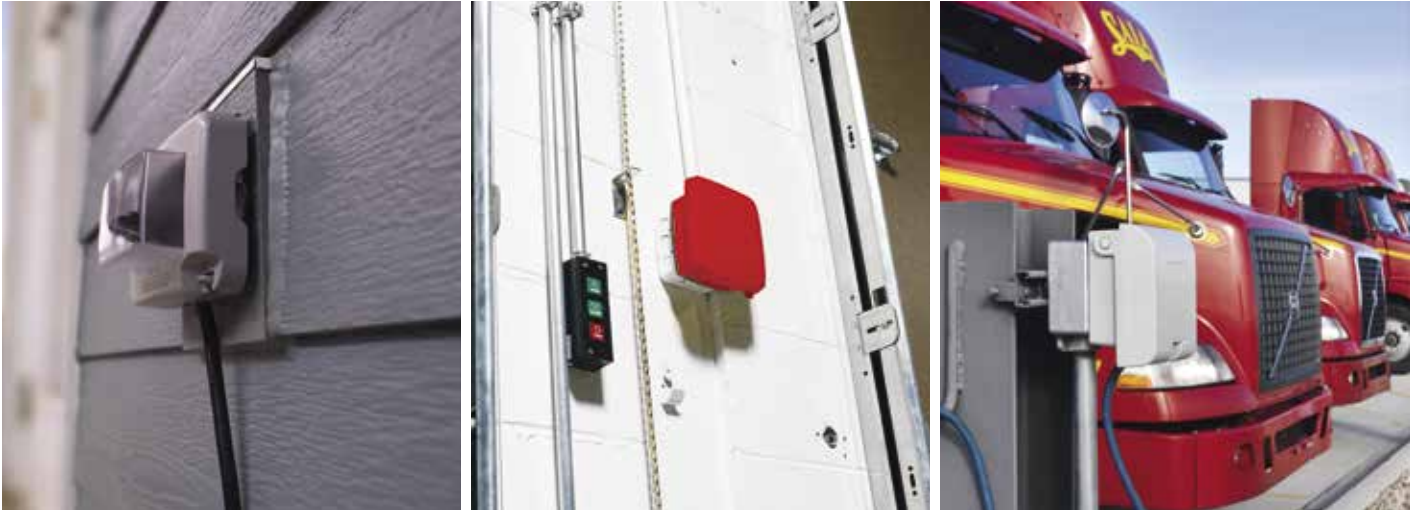

Rugged Design, Code-Compliant Protection

Our durable die-cast, low-profile, and plastic in-use weatherproof covers offer rugged protection in all types of applications.

STAY COMPLIANT 2020 NEC CODE, ARTICLE 406.9 (B)(1)

Intermatic Weatherproof Covers meet or exceed the latest NEC requirements for extra-duty applications and wet locations.

- For the 2020 NEC, all 15 and 20 ampere, 125 and 250 volt receptacles installed in a wet location still must have an enclosure and covers that are weatherproof whether an attachment plug cap is inserted or not.
- A revision now requires all enclosures and covers installed in wet locations for 15 and 20 ampere, 125 and 250 volt receptacles to be listed, and of the "extra-duty" type, not just boxes supported from grade.
- This requirement is now also required for dwelling units as well. The requirement for weather-resistant type receptacles in wet locations is still applicable in the 2020 NEC. This change also provoked changes to Article 590.4(D)(2) for extra-duty covers for all 15 and 20 ampere, 125 and 250 volt receptacles installed at temporary installations in a wet location.
- CEC Section 26-708 compliant.
- Standard weatherproof cover compliance guidelines apply only to 2020 Article 314.15.

WATCH AND LEARN



Our durable line-up of Die-cast and Plastic Weatherproof Covers offers long-lasting protection in all types of rugged applications: industrial, commercial, manufacturing, residential, and more!



Tired of fussing with bulky outdoor weatherproof covers? Upgrade to new WP6000 and WP7000 Series Low-Profile Expandable In-Use Weatherproof Covers from Intermatic.